

CONSERVATION OF STONE

products and methods

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) / 1

The 3 main classes of the conservation methods

- 1. **Regular maintenance** it delays the onset of damage
- 2. **Preventive methods** changing environmental conditions ☞ preventing degradation of materials
- 3. **Intervention methods** direct intervention on the object ☞ limits the impact of environmental conditions on the materials

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) / 2

1. Regular maintenance and precautions

Monitoring of the flow defects: roofing, joints, gutters, ...



Photos C. Bläuer (Berne, CH, BE)

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) / 3




Fribourg, UNI, March 2009 (CH, FR)

1. Regular maintenance and precautions

Monitoring of the flow defects:
roofing,
joints,
gutters, ...



1. Regular maintenance and precautions

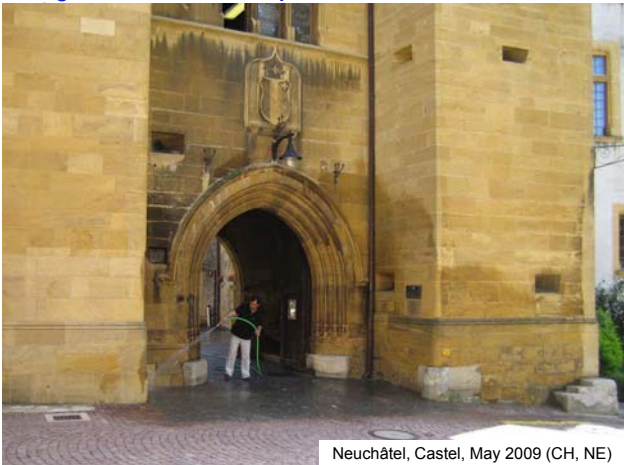

Neuchâtel, Castel, May 2009 (CH, NE)

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) 5

1. Regular maintenance and precautions



Neuchâtel, collegiate, April 2009 (CH, NE)

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) 6


1. Regular maintenance and precautions



Neuchâtel, collegiate, May 2009 (CH, NE)

Materials and conservation of built cultural heritage – Conservation of stone products and methods / 7


1. Regular maintenance and precautions

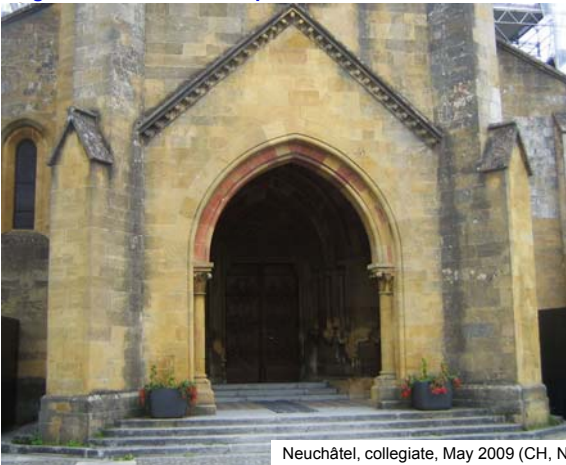

Neuchâtel, collegiate, May 2009 (CH, NE)

Materials and conservation of built cultural heritage – Conservation of stone products and methods / 8

1. Regular maintenance and precautions

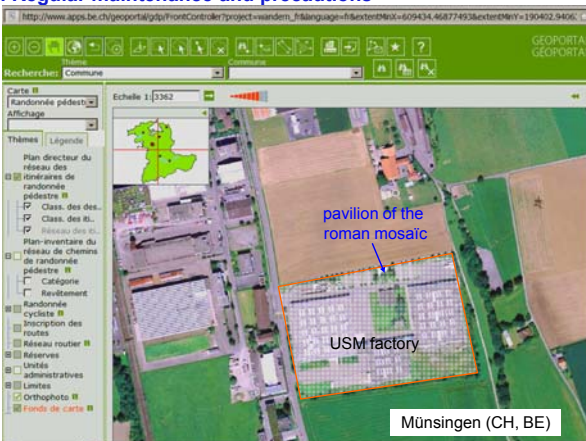

Münsingen (CH, BE)

Materials and conservation of built cultural heritage – Conservation of stone products and methods / 9

1. Regular maintenance and precautions



Münsingen, Roman mosaic, parking of USM, March 2007 (CH, BE)

Materials and conservation of built cultural heritage – Conservation of stone products and methods/10

1. Regular maintenance and precautions




Münsingen, Roman mosaic, parking of USM, March 2007 (CH, BE)

Materials and conservation of built cultural heritage – Conservation of stone products and methods/11



2. Preventive methods

2.1 Control of rising damp: drainages



Vuisternens-devant-Romont (CH, FR) church, 2007




Materials and conservation of built cultural heritage – Conservation of stone products and methods/12


2. Preventive methods

2.1 Control of rising damp


± intervention methods



ventilation gallery



drainage + waterproof barrier



electro-osmosis

Materials and conservation of built cultural heritage – Conservation of stone products and methods /13

2. Preventive methods

2.1 Control of rising damp

± intervention methods

Belmont-sur-Lausanne (CH, VD), 2010



Prague (CZ), 2010



Materials and conservation of built cultural heritage – Conservation of stone products and methods /14

2. Preventive methods

2.2 Protection of façades/sculptures with canopies (auvents), cornices, ...

Protective structures against rain and water flow



Photo C. Bläuer (Zillis, CH, GR)

Materials and conservation of built cultural heritage – Conservation of stone products and methods /15

2.2 Protection of façades/sculptures with canopies, ...



Fribourg, Montorge chapel, December 2009



Fribourg, Stalden, March 2010

Materials and conservation of built cultural heritage – Conservation of stone products and methods /16



Conservation Science Consulting Sàrl

3. Intervention methods

Treatment products must:

- **stabilize** and **improve** the current state
- **slow down** the degradation development
- have a long standing **protective effect**
- not obstruct a **subsequent conservation intervention**
- be **simple to use** and **non-toxic** to the user and the environment

Materials and conservation of built cultural heritage – Conservation of stone products and methods /17



Conservation Science Consulting Sàrl

3. Intervention methods

The main conservation and restoration methods

- surface protections (paints, renders, water repellants,...)
- cleaning, elimination of microorganisms
- elimination of salts, desalination
- replacement of stones and/or mortars
- consolidation

Materials and conservation of built cultural heritage – Conservation of stone products and methods /18

3. Intervention methods

3.1 Protection of façades/sculptures with whitewashes and paints (*badigeons et peintures*)

Functions: Formation of a **sacrificial layer** and/or formation of a **protective layer** on the surface

Binders:

- organic (oil, silicone, acrylic,... based)
- inorganic (lime or silicates)

Use: Protective paint against rain and dirt, anti-graffiti systems,...

Materials and conservation of built cultural heritage – Conservation of stone products and methods /19





Materials and conservation of built cultural heritage – Conservation of stone products and methods /21

3.1 Preventive methods: whitewashes and paints



Fribourg, Rue du Tilleul, December 2009 (CH, FR)

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /22



3.1 Preventive methods: whitewashes and paints



Medieval statues, south portal, Fribourg cathedral (CH, FR)



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /23



3.1 Preventive methods: whitewashes and paints

slide from the course "wall paintings" of C. Blücher

Historic binding materials (*liants*)*

Technique	Principle / binder
Fresco	Pigment dispersion in water applied on fresh not yet set support / lime binder
Lime painting	Pigment dispersion in water or lime water applied on fresh lime wash / lime binder
Lime casein	Pigments mixed with lime casein solution
Glue	Pigments dispersed in glue water
Tempera	Binder is an oil water emulsion e.g. full egg
Oil	Binder is a drying oil e.g. linseed oil (<i>huile de lin</i>), nut oil, etc.
Water glass (liquid silicates)	Preparation of support; application of pigment dispersions in water; fixation with water glass solution

* Incomplete enumeration; binders not mentioned here are e.g. wax, resin (natural and synthetic), many possible mixtures of binding materials, etc.

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /24



3.1 Preventive methods: whitewashes and paints

Painting materials

Colorants (pigments and dyestuffs) and binders

Pigments: grains of coloured materials that are insoluble in the binding media

can be classified according to:

their origin: natural, artificial; organic, inorganic; from plants, from animals, from minerals or earth colours

their colour: blue, red, yellow, black, white...

the metal they contain: Cu-, Pb-, Fe-, Mg-, Cr-, Cd-, Zn-, Ti-, Hg-pigment

Chemical compounds: metal, oxides, carbonates, silicates...


Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /26



3. Intervention methods

3.1 Protection of façades/sculptures with whitewashes and paints

Lime based paints (historical paintings):



- good water vapor permeability and good water absorption;
- easy and reversible treatment;
- lime based paints can be modified with additions like oils, casein => increase of durability
- **need to be repaired or totally re-done regularly**




Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /26



3. Intervention methods

3.1 Protection of façades/sculptures with whitewashes and paints

Pure silicate based paints (water glass = liquid silicates):



- good chemical resistance,
- good water vapor permeability,
- good resistance to UV light,
- do not stop water absorption

Mixtures with water repellent admixtures (like resins, silicones,...) have entirely different properties

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /27

3. Intervention methods

3.1 Protection of façades/sculptures with whitewashes and paints

Organic paints (acrylic, silicone, ...):

- they make impermeable surfaces and hydrophobic surfaces,
- they are sensitive to microorganisms,
- their reversibility depends on the nature of the treated material,
- they need solvents,
- **they are/ can be used in limited cases on historic buildings**

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /28

3. Intervention methods

3.2 Protection of façades with plasters and renders ± paint

Function:

formation of a **protective layer** on the surface

Binders:

- inorganic (clay, lime, hydraulic lime, grey or white cement, silicates)
- organic (epoxy, acrylic,...)

Use: Protective paint against rain and dirt, anti-graffiti systems,...

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /28

3.2 Protection of façades with plasters and renders ± paint



Essert chapel, October 2009 (CH, FR)

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /28

3.2 Protection of façades with plasters and renders ± paint



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /31

3.2 Protection of façades with plasters and renders ± paint



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /32

3.2 Protection of façades with plasters and renders ± paint



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /33

3.2 Protection of façades with plasters and renders ± paint



Materials and conservation of built cultural heritage – Conservation of stone products and methods /04



3. Intervention methods

3.3 Protection of façades/sculptures with water repellants

Aims of making water repellent

- To protect against rain and dirt
- To limit the capillary suction
- To reduce the rate of degradation
- To reduce the impact of the air pollutants and of the biodegradation (algae, lichen, bacteria, etc.)

Materials and conservation of built cultural heritage – Conservation of stone products and methods /05



3. Intervention methods

3.3 Protection of façades/sculptures with water repellants

- **Silicones** – poly-organo-siloxanes or silicone resins
- **Waxes (cires)** – microcrystalline waxes
- **Acrylic resins** mixed with polysiloxane
- **Organofluoride resins** (urethanes, polyethers,...)

Materials and conservation of built cultural heritage – Conservation of stone products and methods /06

3. Intervention methods

3.3 Protection of façades/sculptures with water repellants



Berne (CH), Photo C. Bläuer

The durability of water repellants depends on the product (the chemical functional groups give their properties to the molecules) but usually at least between 5 and 10 years

Degradation :

- photo-degradation induced by photonic irradiation of polymers;
- chemical: in case of interaction with a chemical agent;
- biological

Materials and conservation of built cultural heritage – Conservation of stone products and methods /27

3. Intervention methods

3.3 Protection of façades/sculptures with water repellants

water repellants are not suitable for :

- horizontal areas
- areas where water infiltrations behind the treated part are possible
- supports rich in hygroscopic salts



Photo C. Bläuer

Materials and conservation of built cultural heritage – Conservation of stone products and methods /28

3. Intervention methods

3.3 Protection of façades/sculptures with water repellants

Water repellants disadvantages :

- irreversible
- possible chromatic changes
- development of algae
- different aesthetic changes between treated and non-treated areas
- scaling
- accumulation of the water at the lower parts of buildings

Materials and conservation of built cultural heritage – Conservation of stone products and methods /29

3.3 Protection of façades/sculptures with water repellants



Wengi Büren an der Aare (CH), Photo H.-J. Gerber



Fribourg (CH), Rue du Tilleul, May 2008

Materials and conservation of built cultural heritage – Conservation of stone products and methods /40



3. Intervention methods

3.4 Protection of façades/sculptures with antigraffiti

Role of an antigraffiti:

The aim is to make a layer between the wall to protect the graffiti, in order to prevent the penetration of the paint in the building material and to make cleaning easier

Materials and conservation of built cultural heritage – Conservation of stone products and methods /41



3. Intervention methods

3.4 Protection of façades/sculptures with antigraffiti

The essential properties that should have the antigraffiti:

- **safety:** should not change the colour, the microstructure, the water absorption, the water exchange kinetics of the building material;
- **durability:** must protect against graffiti long enough;
- **efficiency:** every graffiti must go away without any residues;
- **reversibility:** this principle applies to classified monuments and it implies that any treatment must be removable at any time without damage to the original building material.

Materials and conservation of built cultural heritage – Conservation of stone products and methods /42

3. Intervention methods

3.4 Protection of façades/sculptures with antigraffiti

Permanents systems:

Polyurethane or epoxy or acrylic or... layers, impermeable and that remain on the façade even after cleaning.

Resistant to atmospheric influences, they require little maintenance. These products are generally harmful to humans and the environment.

Risks: closing pores => limited water evaporation, colour changes

Cleaning : Hot wasser, solvent

Materials and conservation of built cultural heritage – Conservation of stone products and methods /43

3. Intervention methods

3.4 Protection of façades/sculptures with antigraffiti

Partly permanent systems:

Mono-layer systems: (eg: alcoxysiloxanes based, siloxane copolymers based,... products) the protective layer is partially removed during cleaning so it is necessary to carry out a new application. Permanents residues stay on the treated material.

Cleaning: Hot water

Two-layers systems: one permanent lower layer (hydro-oleophob: oligomere siloxane) + one sacrificial layer that is removed during each cleaning (wax).

Cleaning: hot water

Materials and conservation of built cultural heritage – Conservation of stone products and methods /44

3. Intervention methods

3.4 Protection of façades/sculptures with antigraffiti

Reversible systems:

These products form a sacrificial layer that is removed during the cleaning of the graffiti. The layers are not much resistant to weather conditions and should be applied after each cleaning. Advantage: they influence the visual aspect and the physical properties of the façade very little.

Eg.: polysaccharides, acrylate

Cleaning : Hot water


Materials and conservation of built cultural heritage – Conservation of stone products and methods /45



THEORIE

Protection of façades: water vapour permeability, μ & S_d

matériau poreux perméable à la vapeur d'eau

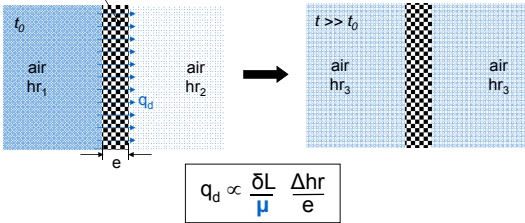

q_d densité de flux [kg/m².s]

δL coefficient de diffusion à la vapeur de l'air [kg/Pa.m.s]

μ facteur/coeff. de résistance à la diffusion de vapeur d'eau [-]

Δhr $hr_1 - hr_2$ [-]


e épaisseur du matériau poreux [m]

Materials and conservation of built cultural heritage – Conservation of stone products and methods /46



THEORIE

Protection of façades: water vapour permeability, μ & S_d

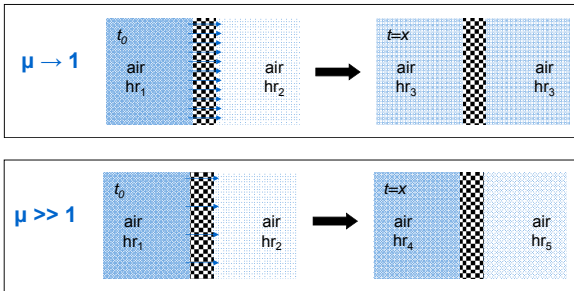

Un matériau dont le facteur $\mu = 10$ est *en théorie* 10 fois plus résistant à la diffusion de vapeur d'eau qu'une couche d'air qui aurait la même épaisseur

Materials and conservation of built cultural heritage – Conservation of stone products and methods /47



THEORIE

Protection of façades: water vapour permeability, μ & S_d

$$S_d = \mu \cdot e$$

S_d résistance à la diffusion de la vapeur d'eau [m]

μ facteur/coeff. de résistance à la diffusion de vapeur d'eau [-]

e épaisseur du matériau poreux [m]

Materials and conservation of built cultural heritage – Conservation of stone products and methods /48

3. Intervention methods

3.5 Cleaning

Main purpose: to remove dirt deposits from the surfaces (primarily aesthetic interest! absolutely necessary only if these deposits can be harmful).

! Every cleaning must (**should!**) be done so that materials and their original surface is preserved (stones AND mortars)

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /49

3. Intervention methods

3.5 Cleaning

The choice of a cleaning method depends on:

- the nature, the density and the adhesion of the **dirt**;
- the nature and the state of the **stones and joints**.

! Any cleaning must be regarded as a **special case** that requires **precedent local tests** and the job must be done by a **competent and well trained staff** !

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /50


3. Intervention methods

3.5 Cleaning



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /51

3.5 Cleaning

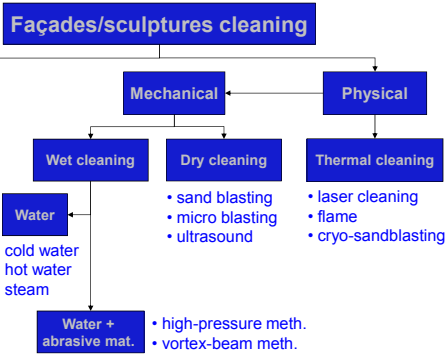

According to L. Goretzki, prof. at the Weimar University

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /52

3. Intervention methods

3.5 Cleaning

Cleaning with laser (wavelength 1064 nm IR):

Interaction between the laser beam and the dark dirt absorb radiation => photoablation: combination of thermal and mechanical interactions between the absorbed radiation and the matter

Advantages: targeted cleaning (sculptures)


Disadvantages: not usable on large areas, interactions with matter not yet fully understood, yellowing of clear substrates

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /53

3. Intervention methods

3.5 Cleaning

Cleaning with laser

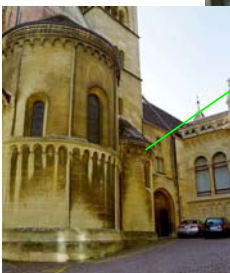

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /54

3. Intervention methods

3.5 Cleaning

Application of impregnated poultice:

Absorbent material (Japanese paper, rice paper, pulp of paper or pulp of cellulose, carboxy-methylcellulose, clay, sepiolite, etc.) impregnated with water or chemicals (acid, alkali, surfactants, complexing agents like EDTA)

Advantages: targeted cleaning, without any pollution if only water is used

Disadvantages: not usable on large areas, pollution caused by chemical additives


Materials and conservation of built cultural heritage – Conservation of stone products and methods/165

http://upload.wikimedia.org/wikipedia/commons/e/e9/Prague-charles_bridge-hradcany.jpg

3. Intervention methods

3.5 Cleaning

Application of impregnated poultices



Prague (CZ), Charles Bridge, September 2010

Materials and conservation of built cultural heritage – Conservation of stone products and methods/166

3. Intervention methods

3.5 Cleaning

Cleaning with scalpel

ONLY FOR RESTORER !!!



Müstair, Heiligkreuzkapelle (CH), 2007

Materials and conservation of built cultural heritage – Conservation of stone products and methods/167

3. Intervention methods

3.6 Elimination of microorganisms and plants

- **Biocides:** treatment with chemical agents (bactericides, algicides, fungicides, lichenicides, herbicides, etc.);
- **Antibiotics;**
- **U.V treatment:** treatment using an ultraviolet ray generator;
- **Mechanical methods:** elimination with tool (brush, scalpel, saw (*scie*), vacuum (*aspirateur*), etc.).

Materials and conservation of built cultural heritage – Conservation of stone products and methods /58

3. Intervention methods

3.7 Desalination

- Desalination (*désalinisation ou dessalement*) = only a REDUCTION of the content of soluble salts
- The desalinations are superficial and selective => changes in the system



Materials and conservation of built cultural heritage – Conservation of stone products and methods /59

3. Intervention methods

3.7 Desalination

Always avoid water which would re-mobilize the soluble salts!

Mechanical desalinations:

- vacuum cleaner,
- dry brushing



Materials and conservation of built cultural heritage – Conservation of stone products and methods /60

3. Intervention methods

3.7 Desalination

Desalination poultices:

1. Application of Japanese paper
2. Application of wet compress
 - of cellulose;
 - of newspaper;
 - of clay;
 - of ion exchange resins...



Materials and conservation of built cultural heritage – Conservation of stone products and methods/81

3. Intervention methods

3.7 Desalination

- **Successive water baths** (for movable objects with a limited size)
- **Electrochemical desalination:** highly controversial; it works "in theory"; the materials change of colour in the vicinity of the electrodes
- **Chemical transformation:** transformation of soluble salts in non- or very poorly soluble salts (ie : transformation of calcium sulphate into calcium carbonate by application of ammonium carbonate then baryum hydroxide)

Materials and conservation of built cultural heritage – Conservation of stone products and methods/82

3. Intervention methods

3.8 Replacements / rhabillages ou ragréages

Remodeling of small deteriorated stone surfaces with suitable mortars: same appearance than the remodeling stone, similar hardness

In case of deep remodelings or remodeling of large surfaces a structural support is necessary (small pegs (*chevilles*) and stainless wire network)

Maximum remodeling surface: 30 cm² – Beyond=> yokes (*empièchements*) according to the ARMP (association romande des métiers de la pierre) charter

Materials and conservation of built cultural heritage – Conservation of stone products and methods/83

3.8 Replacements / rhabillages ou ragréages



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /64

3.8 Replacements / rhabillages ou ragréages



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /65

http://www.omnium-facades.com/omnium/img_catalogue/1114521050_1.jpg

3. Intervention methods

3.9 Replacements / yokes (empiècements)

Holes are made in the degraded stones, then new yokes (*empiècements*) of the original stone material –or of a similar stone (judged suitable after laboratory tests)- are placed.

If this work must be done on protruding parts or on parts exposed to splashing (*rejaillissement*), better resistant stones are accepted.

Minimum thickness: 10 cm for hard limestones; 15 cm for soft limestones, sandstones and molasses (according to the ARMP charter).



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /66

3. Intervention methods

3.10 Consolidation

The consolidating agent must:

- Restoring the link between grains
- penetrate the matter along a sufficient depth to establish the link between the healthy and impaired parts
- not form harmful compounds such as salts
- not change the color of the stone
- not prevent subsequent treatments
- not accelerate degradation
- not modify the permeability to water vapor

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) 87

3. Intervention methods

3.10 Consolidation

The reasons why one consolidates:

a few cm to a few mm

- contour scaling (*décollement de plaques*)
- render detachments

≤ 1 mm

- granular disintegration of stones
- consolidation of too soft renders
- detachments of polychrome layers

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) 88

3.10 Consolidation

≥ a few cm	A few cm to a few mm	≤ 1 mm
mortars	washes, suspensions	solutions, melted products
Inorganic materials		
Lime mortars, mortars with mixed binder (<i>bâtard</i>), cement mortars, pouzzolanic mortars	Lime putty (<i>chaux en pâte</i>), whitewash (<i>lait de chaux</i>), cement milk (<i>Schlämme ou lait de ciment</i>)	Water lime (<i>eau de chaux</i>), Water glass (<i>verre soluble, Wasserglas</i>) Fluates
Synthetic organic materials		
Synthetic mortars Synthetic resins + aggregates		Synthetic resins
Synthetic inorganic materials (silans, silicic esters)		
Organosilicates based mortars	Materials with quick hydrolysis	Silicic esters
Shortlived consolidants		
		Non-polar cyclic compounds, hydrocarbons
Natural resins, tar (<i>goudron</i>)		

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) 89

3. Intervention methods

3.10 Consolidation, methods:

- With poultices: regular impregnation of the compress with treatment solutions;
- With a brush: the consolidant is applied on the degraded stone surface with a brush;
- By spraying: using a sprayer to spread the consolidant on the surface (until refusal!) (*jusqu'à refus !*);
- By injection: to fill voids in depth;
- By immersion: for movable objects with a limited size that can be treated in the laboratory within a consolidant bath

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /70

3. Intervention methods

3.10 Consolidation

Example:
Application of Fucosil (silicic ester) on a molasse sandstone façade from the Berne cathedral



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /71

3. Intervention methods

3.10 Consolidation

Example:
Application of Fucosil (silicic ester) on a molasse sandstone sample from the Berne cathedral



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /72

3. Intervention methods

3.10 Consolidation, history of materials

- ... - ... Limewater
- 1850 - 1960 Alkaline potassium silicate
- 1900 - 1960 Fluosilicates
- ... - 1930 Paraffin
- ... - 1930 Oil linseed
- 1960 - 1972 Polyester
- 1952 - ... Acrylic resins
- 1960 - ... Silicic acid esters
- 1990 - ... Bio-remineralization
- ~2010 - ... Nano-lime
- ~2011 - ... Hydroxyapatite (+ CaCl₂ !!!)

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /73

3. Intervention methods

3.10 Consolidation, example of consolidants

The alkali silicate solutions

Water glass

(*verre soluble ou Wasserglas* – Me_4SiO_4 , $Me = K, Na, Li$):

Known since antiquity, largely used in the second half of the nineteenth century until 1930

Disadvantages of this type of treatment:

- formation of soluble salts and efflorescences
- bad penetration
- formation of ± hard, ± insoluble and waterproof crusts

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /74

3. Intervention methods

3.10 Consolidation, example of consolidants


The alkali silicate solutions

Water glass (*verre soluble ou Wasserglas* – *liquid silicates*):



Me = sodium, potassium, (lithium)

Setting reaction:



Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /75

3. Intervention methods

3.10 Consolidation, example of consolidants

The silicic acid esters = ethyl silicates (very often employed!)

Used since 1960

Classic products: Wacker OH, Wacker OH 100, Motema 28, Motema 30, TEOS, Keimsilex OH, Tegovakon V, Funcosil, Steinfestiger OH/OH 100,...



Usable on: sandstone, terra cotta, brick,... (siliceous materials)

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /76

3. Intervention methods

3.10 Consolidation, silicic acid esters

tetraethoxysilanes (TEOS): R1=R2=R3=C₂H₅

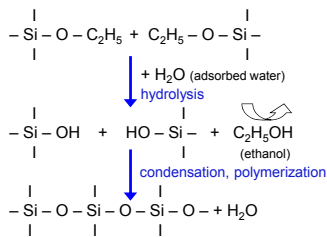

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /77

3. Intervention methods

3.10 Consolidation, silicic acid esters



Photo S. Mülhhaus Ebersole

Materials and conservation of built cultural heritage – Conservation of stone (products and methods) /78

3. Intervention methods


3.10 Consolidation, silicic acid esters

Laboratory tests / Ethyl silicates


Photo C. Bläuer



3.10 Consolidation, silicic acid esters

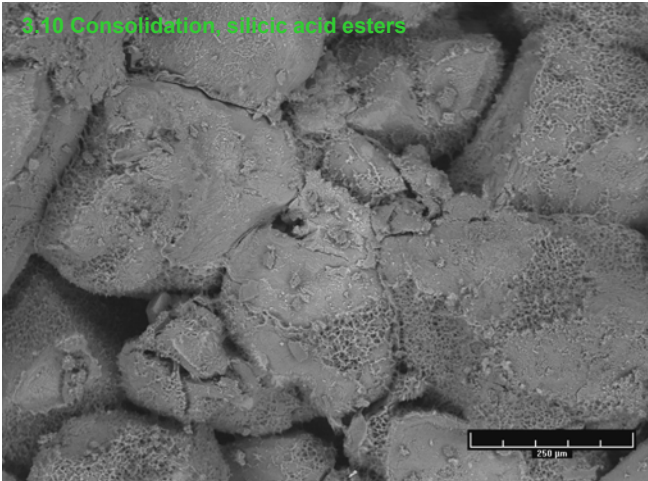

3.10 Consolidation, silicic acid esters

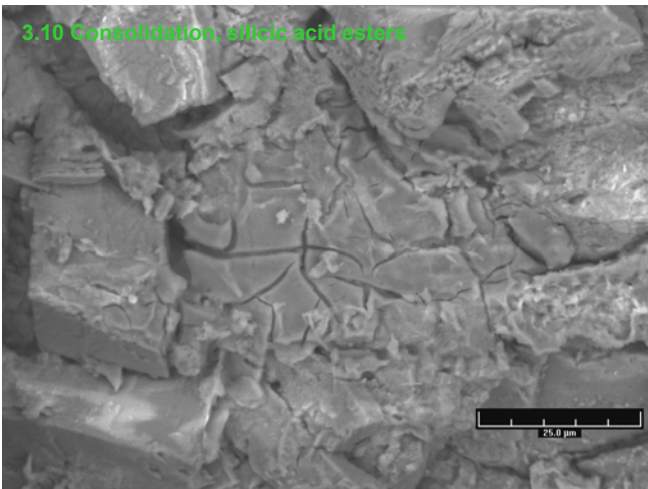

Bibliography :

- Arnold, A. (1979).** *Ursachen und Sanierungsmöglichkeiten der Schäden an Baudenkmalern aus Steinen und Mörteln.* - Eidg. Techn. Hochschule Zürich, Tagung über die Erhaltung von Baudenkmalern aus Steinen und Mörteln, 1. März 1979
- Association romande des métiers de la pierre,** Groupe romand des services de conservation du patrimoine bâti, Expert-Center Lausanne (2000). *Charte d'éthique et de bienfaisance pour la réfection de monuments et de bâtiments.*
- Bläuer Böhm C. (1997).** *Möglichkeiten zur Konservierung,* Modul „Steine und Mörtel“, ND Denkmalpflege, Berner Fachhochschule HTAB, Vorlesung.
- Bläuer Böhm C. (2005).** *Auswirkungen von hydrophoben Fassadenmaterialien auf die Erhaltung und Pflegefähigkeit von Baudenkmalern, Beobachtung aus der Praxis.* In Matthias Exner und Dörthe Jakobs Ed.: Klimastabilisierung und bauphysikalische Konzepte. Wege zur Nachhaltigkeit bei der Pflege des Weltkulturerbes. Tagung 25.- 27. November 2004, Insel Reichenau . ICOMOS Journals of the German National Committee XLII, 117-128 (pdf: <http://www.cscsar.ch/5-0-publications.html>)
- Bromblet P. & Vieweger T. (2007).** *Le laser de nettoyage de la pierre.* CICRP, Marseille (pdf: <http://www.cicrp.fr/docs/laser.pdf>)
- Bromblet P. , & al. (2002)** *Consolidation et hydrofugation de la pierre,* dossier technique, Monumental 2002, revue scientifique et technique des monuments historiques, éditions du Patrimoine, centre des monuments nationaux, p. 200-243
- Goretzki, L. (1998).** *Graffiti-Schutzsysteme für Fassadenbaustoffe.* Baupraxis & Dokumentation, 10, Expert Verlag Ed.

Materials and conservation of built cultural heritage – Conservation of stone products and methods | 82

Bibliography :

- Henry A. (ed.) (2006).** *Stone conservation. Principles and practice.* Donhead
- Heritage A. & al., (2013).** *Desalination of Historic Buildings, Stone and Wall Paintings,* Archetype Publications Ltd
- Horie C.V. (2010).** *Materials for conservation. Organic consolidants, adhesives and coatings.* Routledge Ed.
- Lazzarini L. & Laurenzi Tabasso M. (1986).** *La restauration de la pierre.* Publications ERG
- Philippon J. & al., (1992).** *La conservation de la pierre monumentale en France.* Presse du CNRS
- Selwitz C. (1992)** *Epoxy resins in stone conservation.* Research in conservation, 7, The Getty conservation institute (http://www.getty.edu/conservation/publications/pdf_publications/epoxyresins.pdf)
- Vallet J.-M. (2000).** *La protection de la pierre. Guide sur les hydrofuges de surface.* Cahiers techniques du Cercle des Partenaires du patrimoine, 3. Laboratoire de Recherche des Monuments Historiques, Champs-sur-Marne
- Vergès-Belmin V. et Bromblet P. (2000)** *Le nettoyage de la pierre,* dossier technique, monumental, revue scientifique et technique des monuments historiques, éditions du Patrimoine, centre des monuments nationaux, p. 220-273.
- Wittman F.H. & Prim P. (1938)** *Mesure de l'effet consolidant d'un produit de traitement.* Matériaux et construction, vol. 16, No 94

Materials and conservation of built cultural heritage – Conservation of stone products and methods | 83
